

E-Series 3-Way 0° Power Divider

5 - 120 MHz

ESSM-3-1-75

Features

- * 3 Way
- * 0 Degree
- * Surface Mount

Specifications @ 25°C

Frequency Range	5 - 120 MHz	
Insertion Loss	Typical	Maximum
	5 - 50 MHz	0.2 dB / 0.5 dB
	50 - 60 MHz	0.2 dB / 0.5 dB
60 - 120 MHz	0.25 dB / 0.6 dB	
Isolation	Typical	Minimum
	5 - 50 MHz	37 dB / 30 dB
	50 - 60 MHz	40 dB / 35 dB
	60 - 120 MHz	36 dB / 28 dB
Amplitude Unbalance	Maximum	
	5 - 50 MHz	0.1 dB
	50 - 60 MHz	0.1 dB
60 - 120 MHz	0.2 dB	
Phase Unbalance	Maximum	
	5 - 50 MHz	1°
	50 - 60 MHz	1°
60 - 120 MHz	2°	

Operating Characteristics


Impedance 75 Ohms Nominal

Absolute Maximum Ratings

Parameter	Absolute Maximum
Maximum Power Rating	1 Watt
Internal Load Dissipation	0.125 Watt
Pin Temp (10 sec)	260°C
Storage Temperature	-55°C to 100°C
Operating Temperature	0°C to 70°C

Additional Specifications

I/P RETURN LOSS 34 dB TYP 28dB MIN O/P RETURN LOSS 25 dB TYP 20 dB MIN.

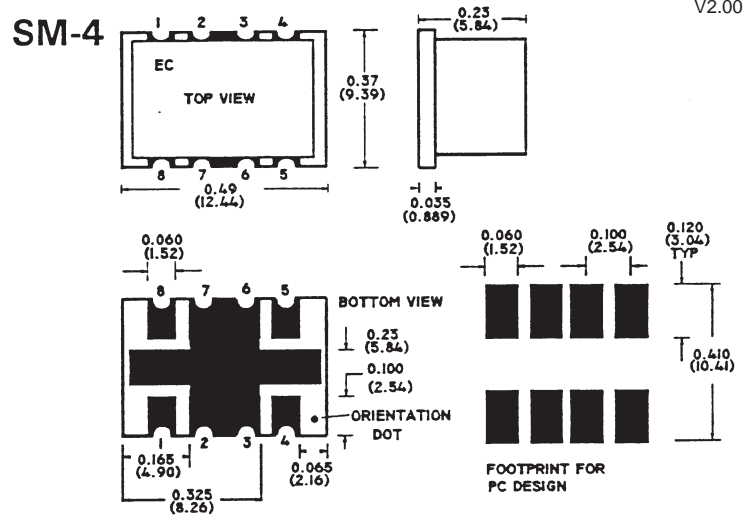

V2.00

Function	Pin No.
Not Connected	-
External 75 Ohms	-
Ground	2,3,6,7
Case Ground	-
Input	8
Port 1	1
Port 2	4
Port 3	5

S 1183 A

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

Asia/Pacific: Tel. +81 3 3263 8761
Fax +81 3 3263 8769

Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

109