
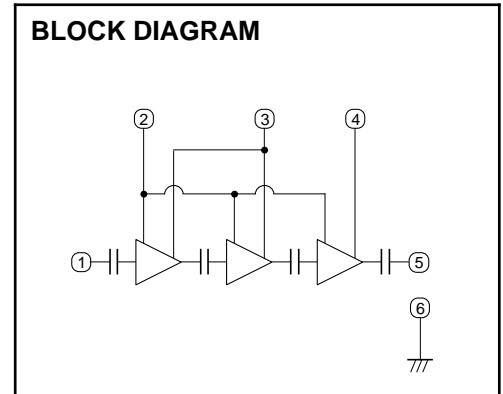


MITSUBISHI RF POWER MODULE  
**M68749**

380-400MHz, 12.5V, 5W, DIGITAL MOBILE RADIO

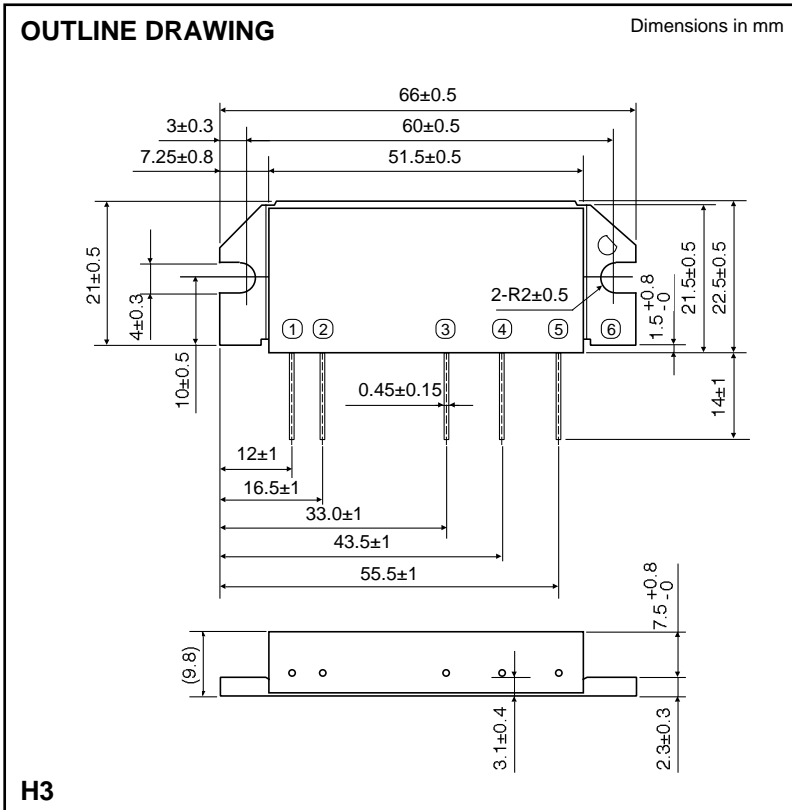

- PIN:
- ① Pin : RF INPUT
  - ② VBB : BASE BIAS SUPPLY
  - ③ VCC1: 1st. DC SUPPLY
  - ④ VCC2: 2nd. DC SUPPLY
  - ⑤ Po : RF OUTPUT
  - ⑥ GND: FIN

**ABSOLUTE MAXIMUM RATINGS** (Tc=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
Vcc	Supply voltage	ZG=ZL=50 , VBB=8.5V	17	V
VBB	Bias voltage	ZG=ZL=50 , Vcc 13.2V	9	V
Icc	Total current	ZG=ZL=50	6	A
P <sub>in</sub> (max)	Input power	ZG=ZL=50 , Vcc 13.2V	300	mW
P <sub>O</sub> (max)	Output power	ZG=ZL=50	25	W
T <sub>C</sub> (OP)	Operation case temperature	ZG=ZL=50	-30 to +110	°C
T <sub>stg</sub>	Storage temperature		-40 to +110	°C

Note. Above parameters are guaranteed independently.

**ELECTRICAL CHARACTERISTICS** (Tc=25°C unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		Unit
			Min	Max	
f	Frequency range		380	400	MHz
P <sub>O</sub>	Output power	P <sub>in</sub> =200mW, VCC=12.5V, VBB=9V, ZG=ZL=50	13		W
η	Total efficiency		15		%
2f <sub>o</sub>	2nd. harmonic	VCC=12.5V, VBB=9V, PO=5W (P <sub>in</sub> :controlled), ZG=ZL=50		-25	dBc
3f <sub>o</sub>	3rd. harmonic			-30	dBc
in	Input VSWR			2.8	-
G <sub>p</sub>	Power gain		28		dB
IMD3	3rd. internal modulation	VCC=12.5V, VBB=9V, PO=(AVE)=5W		-25	dBc
IMD5	5th. internal modulation	(P <sub>in</sub> :controlled) 2tone, f=10kHz, ZG=ZL=50		-32	dBc
-	Load VSWR tolerance	VCC=15.2V, VBB=9V, PO=13W (P <sub>in</sub> :controlled) ZG=50 , Load VSWR=4:1 (All phase)	No degradation or destroy		-
-	Stability	P <sub>in</sub> =0-300mW, VCC=10-16V, VBB=9V, PO 20W, I 3.0 (All phase), ZG=50	No parastic oscillation		Note 1

Note. Above parameters, ratings, limits and test conditions are subject to change.

Note 1. Stability is tested by sampling test (10pcs/Lot)

**TYPICAL PERFORMANCE DATA**

