

# MGFC42V4450

## 4.4~5.0GHz BAND 16W INTERNALLY MATCHED GaAs FET

### DESCRIPTION

The MGFC42V4450 is an internally impedance-matched GaAs power FET especially designed for use in 4.4~5.0 GHz band amplifiers. The hermetically sealed metal-ceramic package guarantees high reliability.

### FEATURES


- Class A operation
- Internally matched to 50Ω system
- High output power  
 $P_{1dB} = 18\text{ W (TYP) @ 4.4~5.0 GHz}$
- High power gain  
 $G_{LP} = 10\text{ dB (TYP) @ 4.4~5.0 GHz}$
- High power added efficiency  
 $\eta_{add} = 32\% \text{ (TYP) @ 4.4~5.0 GHz, } P_{1dB}$
- Hermetically sealed metal-ceramic package
- Low distortion [Item: -51]  
 $IM3 = -45\text{ dBc (TYP) @ } P_o = 31\text{ (dBm) S.C.L.}$

### APPLICATION

- Item-01: 4.4~5.0 GHz band power amplifiers.
- Item-51: Digital radio communication

### QUALITY GRADE

- IG

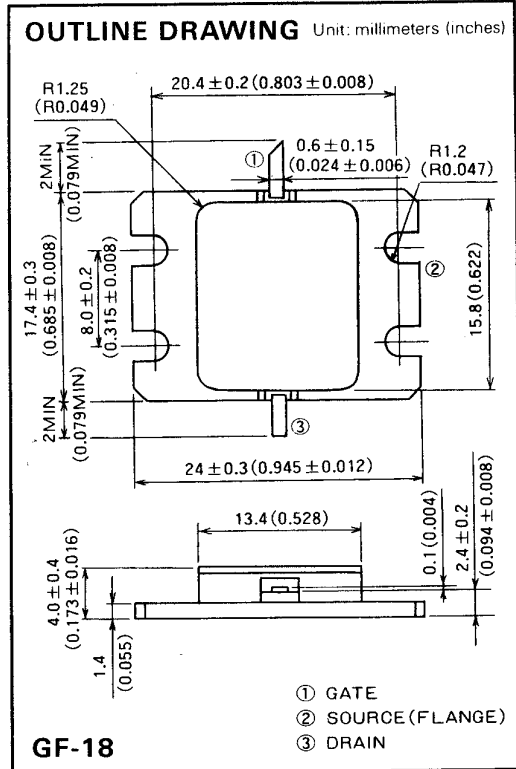

### ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

Symbol	Parameter	Ratings	Unit
V <sub>GD0</sub>	Gate to drain voltage	-15	V
V <sub>GS0</sub>	Gate to source voltage	-15	V
I <sub>D</sub>	Drain current	12	A
I <sub>GR</sub>	Reverse gate current	-40	mA
I <sub>GF</sub>	Forward gate current	+84	mA
P <sub>T</sub>	Total power dissipation *1	78.9	W
T <sub>ch</sub>	Channel temperature	175	°C
T <sub>stg</sub>	Storage temperature	-65 ~ +175	°C

\*1: T<sub>C</sub> = 25°C

### RECOMMENDED BIAS CONDITIONS

- V<sub>DS</sub> = 10V
- I<sub>D</sub> = 4.5A
- R<sub>g</sub> = 25 Ω
- Refer to Bias Procedure

### ELECTRICAL CHARACTERISTICS (Ta = 25°C)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
I <sub>DSS</sub>	Saturated drain current	V <sub>DS</sub> = 3V, V <sub>GS</sub> = 0V	—	9	12	A
g <sub>m</sub>	Transconductance	V <sub>DS</sub> = 3V, I <sub>D</sub> = 4.4A	—	4	—	S
V <sub>GS(off)</sub>	Gate to source cut-off voltage	V <sub>DS</sub> = 3V, I <sub>D</sub> = 80mA	-2	-3	-4	V
P <sub>1dB</sub>	Output power at 1dB gain compression	V <sub>DS</sub> = 10V, I <sub>D</sub> = 4.5A, f = 3.7~4.2GHz	41.5	42.5	—	dBm
G <sub>LP</sub>	Linear power gain		9	10	—	dB
I <sub>D</sub>	Drain current		—	5.4	—	A
η <sub>add</sub>	Power added efficiency		—	32	—	%
IM <sub>3</sub>	3rd order IM distortion *1		-42	-45	—	dBc
R <sub>th(ch-c)</sub>	Thermal resistance *2		ΔV <sub>f</sub> method	—	—	1.9





\*1: Item-51, 2-tone test Po = 31dBm Single Carrier Level f = 5.0 Δf = 10MHz.

\*2: Channel to case

# MGFC42V4450

## 4.4~5.0GHz BAND 16W INTERNALLY MATCHED GaAs FET

### TYPICAL CHARACTERISTICS (Ta=25°C)

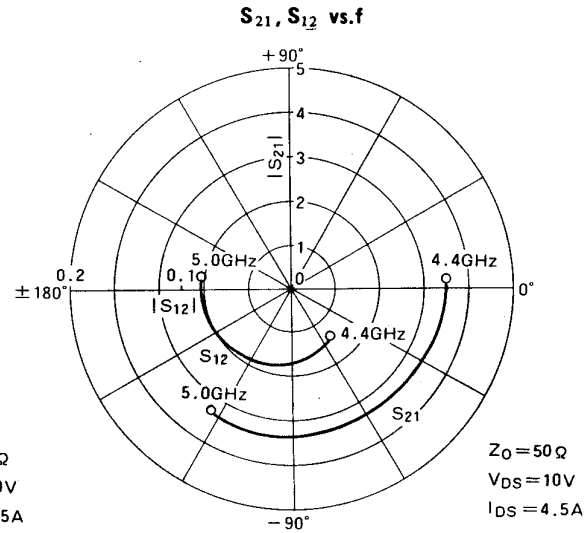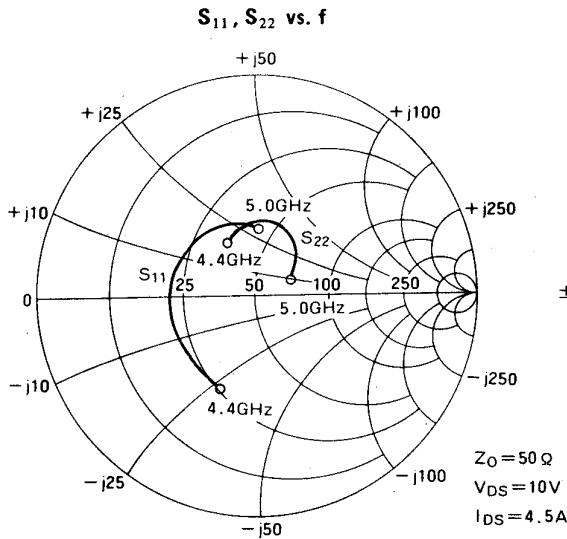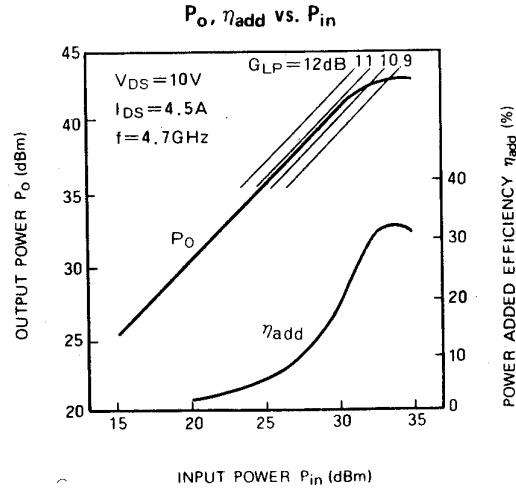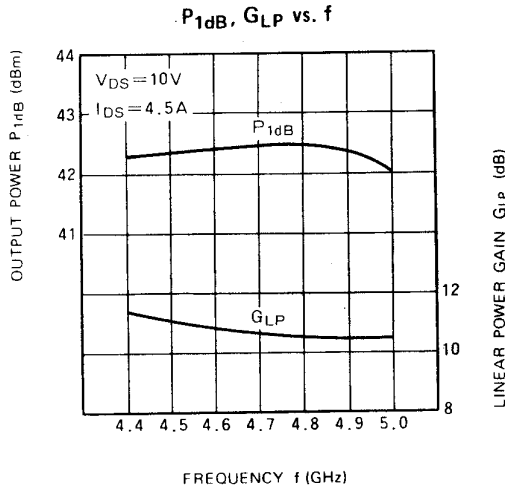

### S PARAMETERS (Ta=25°C, V<sub>DS</sub>=10V, I<sub>DS</sub>=4.5A)

f (GHz)	S Parameters (TYP.)							
	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	Magn.	Angle (deg.)	Magn.	Angle (deg.)	Magn.	Angle (deg.)	Magn.	Angle (deg.)
4.4	0.46	-113	3.63	3	0.054	-49	0.31	121
4.5	0.41	-156	3.50	-20	0.063	-78	0.33	101
4.6	0.40	-179	3.45	-38	0.068	-93	0.33	90
4.7	0.38	154	3.42	-61	0.072	-123	0.33	79
4.8	0.37	135	3.38	-77	0.075	-140	0.31	71
4.9	0.33	109	3.34	-101	0.078	-167	0.25	51
5.0	0.29	89	3.27	-122	0.079	172	0.17	22